


A Contented Cow FREE FROM MAMMITIS

treated with MANNINGS PENICILLIN

NORMAL STRENGTH (Blue Tin)
25,000 units per tube, 12 tubes
9/4; 24 tubes 18/8.

STRONGER STRENGTH (Green Tin)
50,000 units per tube, 12
tubes 11/-.

STRONG STRENGTH (Red Tin)
100,000 units per tube; 14/-
per doz. tubes.

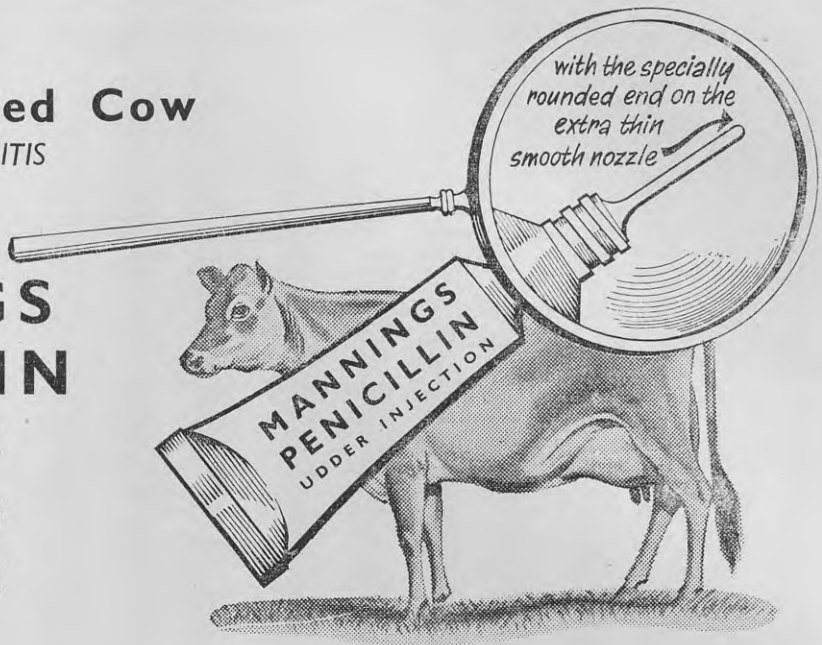


MANNINGS

P.3.

COOPER SHEEP SHEARING EQUIPMENT

Cooper Horizontal Type Electric Friction Gear.

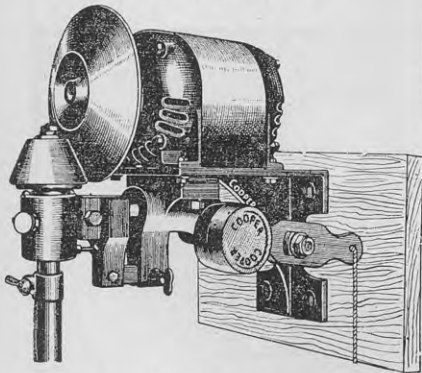


This popular Cooper model is offered to the farmer with improvements. High grade, $\frac{1}{2}$ h.p. motor. Single and three phase. Designed to give long service. Special electric grinders.


Cooper 1 STAND PORTABLE MACHINE

Powered with a 1 h.p. Villiers engine and complete with grinder.

Fully illustrated pamphlet on request

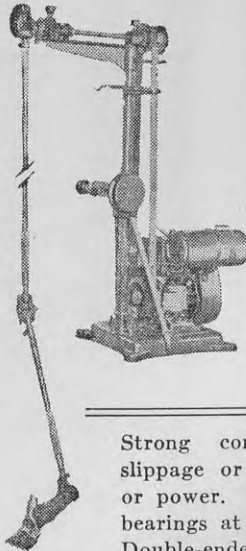

Cooper Friction Gear The "Leader" Shafting Model.

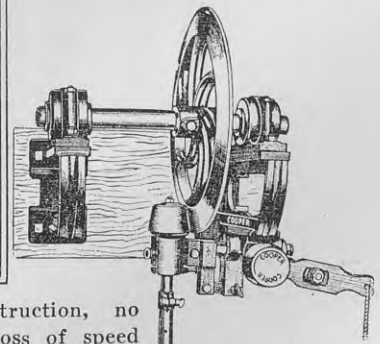

Strong construction, no slippage or loss of speed or power. Trouble-free efficiency. Ball-bearings at all necessary points. Single or Double-ended ball-bearing grinders.

THE COOPER ENGINEERING CO. (N.Z.) LTD., BOX 599, AUCKLAND.

DISTRIBUTORS THROUGHOUT N.Z.

WRITE FOR THE NAME OF YOUR LOCAL AGENT